


Strikes, Combination

10-252=10-055x10-026, 10-254=10-094x10-026, 10-248=10-063x10-094

Jamb Type: Metal
Style: Combination
Standard for: F300-Series
Optional for: H-Series | S200-Series

NOTE:

- 4" (102) For H- and S200-Series
 4" (102) minimum for F360/362
 5½" (138) minimum for FA360/362
- Dimensions X, Y and Z are variables dependent on door thickness
- Curved strike extension beyond jamb at Z must not be less than ¾" (5) to ensure proper functioning of latch bolt
- Strike location on frames must be adjusted for thickness of door silencers when used

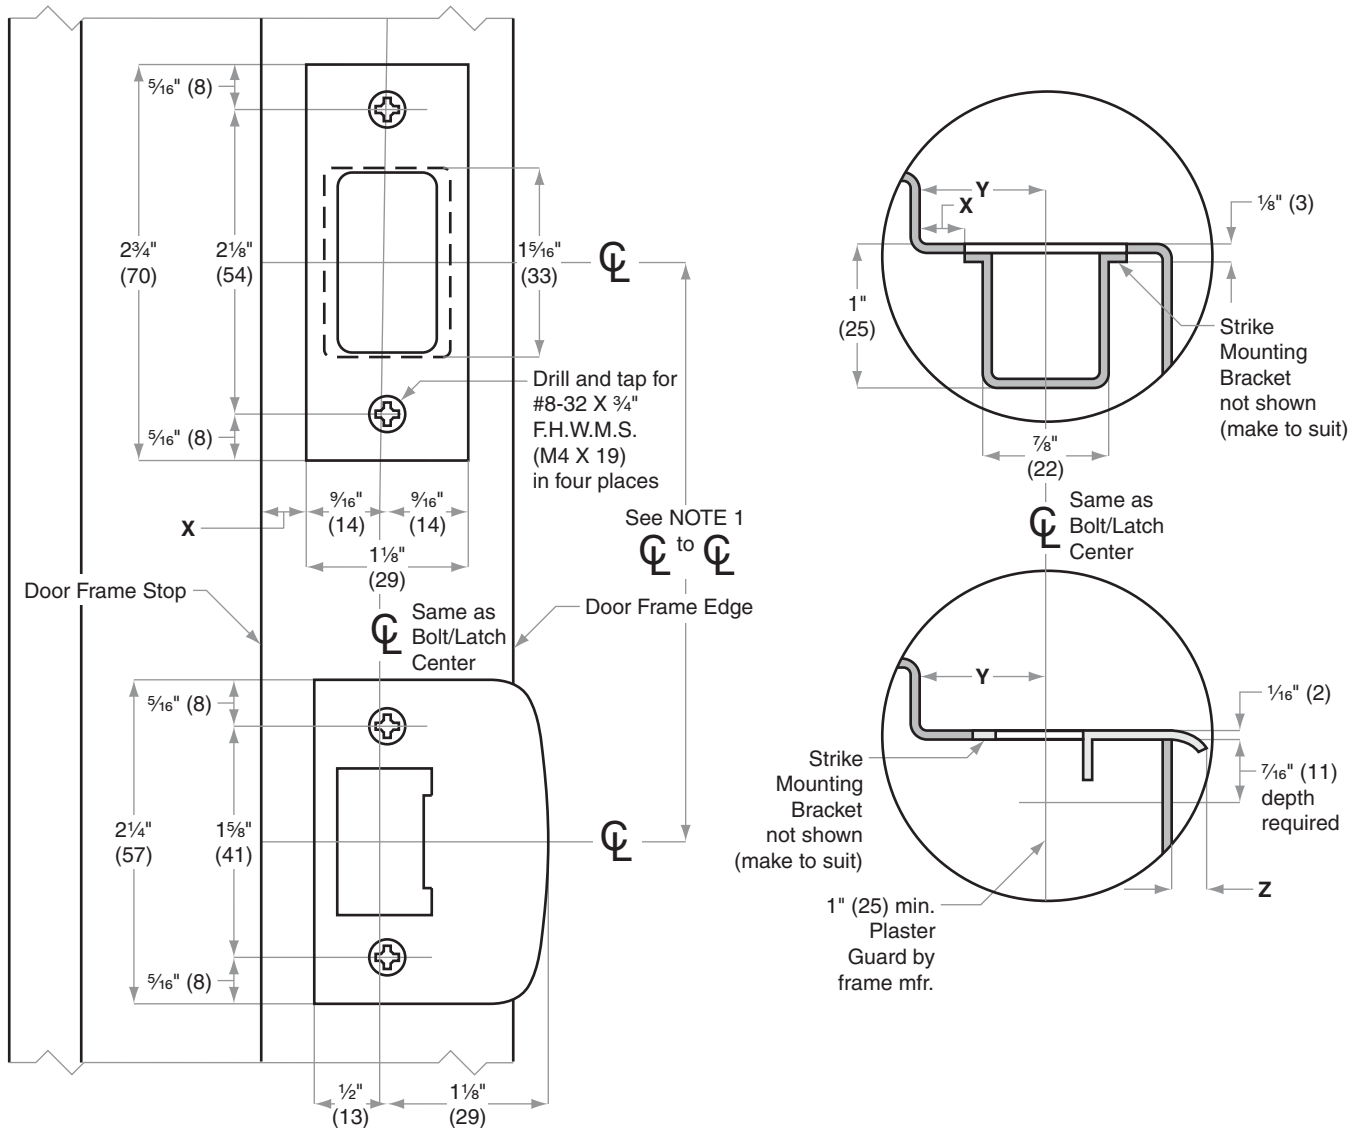

Dimensions shown in parentheses () are in millimeters

Job: _____

Date: _____

Door Thickness: _____

Remarks: _____

**TEMPLATE
J906**