


Strikes

10-025, 10-072, 10-087

Jamb Type:	Wood
Style:	ANSI Standard for 1 $\frac{3}{4}$ " (44mm) doors
Standard for:	AL-Series (10-025) D-Series Knobs (10-025) ND-Series Lever (10-025) L/LV9000-Series (10-072)
Optional for:	A-Series B250-Series F-Series S-Series

NOTE:

1. When reinforcement plate is specified, mortise additional $\frac{1}{8}$ " (3) to Dimension X
2. Strike location on frames must be adjusted for thickness of door silencers when used

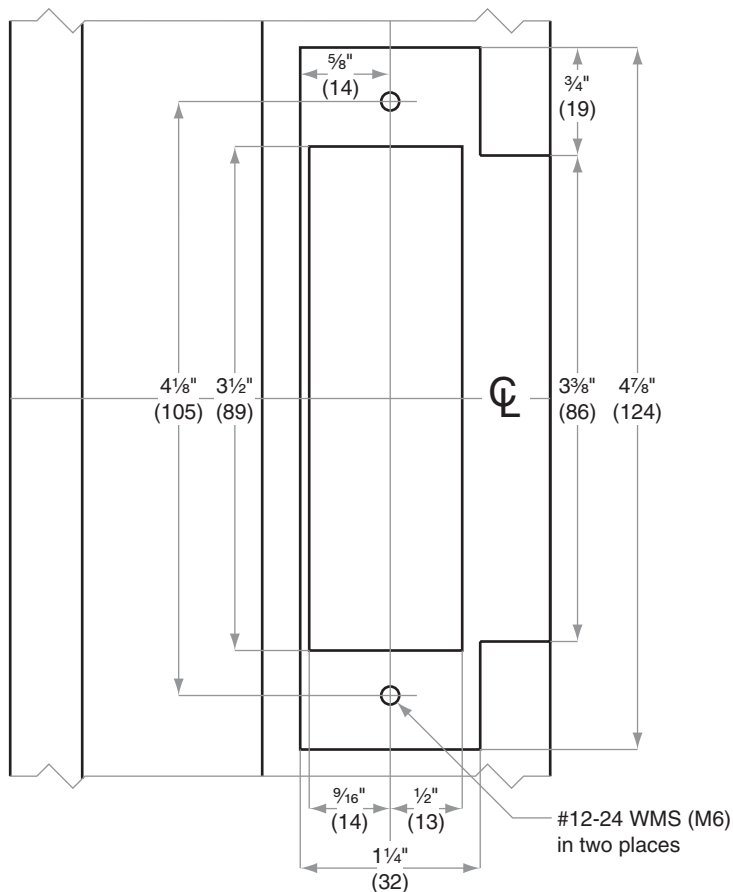

Ⓞ Common to Lock, Strike and Door

X + $\frac{1}{64}$ "

Dimension X: 10-025: $\frac{3}{32}$ " (2) when strike box not specified
 10-072 and 10-087: $\frac{5}{32}$ " (4) for strike box, detached

Dimensions shown in parentheses () are in millimeters

Job: _____

Date: _____

Door Thickness: _____

Remarks: _____

**TEMPLATE
J918**